

FIX-N-FAX #130

CALIFORNIA DEPARTMENT OF FORESTRY
AND FIRE PROTECTION

Number 130

Mandatory Compliance

Revised: June, 1999

CCV MINIMUM LABELING REQUIREMENTS
(Interior)

This publication is intended to identify the minimum interior labeling requirements for all Department CCV's. These labels/signs are available from Conservation Camps located in both Regions. All labels/signs shall be maintained in good condition, and legible to the viewer at all times. Please refer to following pages for more information.



Required
1 ea. Visible from inside front mounted to rear of crew compartment.
1 ea. Visible from inside rear mounted in front of crew compartment.
Both at height most conspicuous to viewers.



Required:
1 ea. Per window; 6 ea. per CCV.

Color
Red w/white
Lettering



Required:

1 ea. On any right rear window within 62" of vehicle exhaust or any window directly above exhaust.


Color:
Red w/white
Lettering



Required:

1 ea. Visible from inside front.
1 ea. Visible from inside rear.
2 ea. Per roof emergency exit.


Color:
Red/w white
Lettering

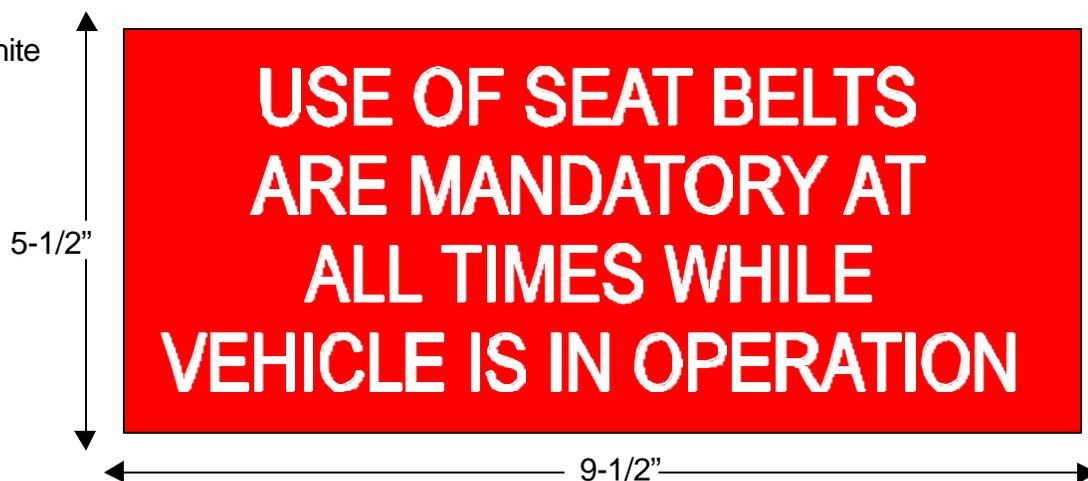

Required:

1 ea. Mounted front of crew compartment visible inside rear at a height most conspicuous to viewers.
1 ea. Mounted rear of crew compartment visible inside front at a height most conspicuous to viewers.

Color:
White/w red
Reflective 4"
Lettering

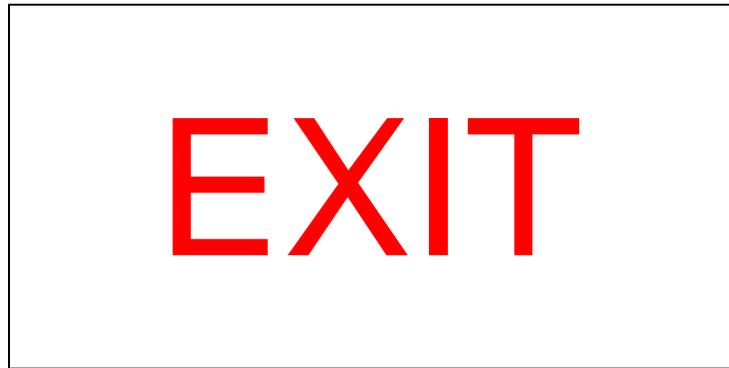

Required:
1 ea. On crew compartment door mounted visible from inside front.

NOTE: Letters: Red reflective, Helvetica Med. Cond. 4" High X 71%, Standard Register Font.

(SEE FIX-N-FAX INDEX)